


Water heaters Chauffage d'eau

TBRC 104 I

Clampable flange immersion heaters Thermoplongeurs à bride clamp Ø 104

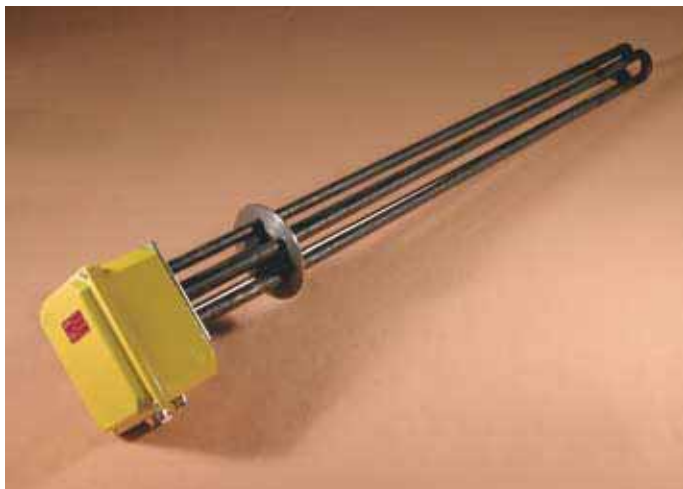

- Particulary suitable to food and pharmaceutical industries
- Fast fitting and removal
- Easy cleaning without retention zone
- AISI 316L sheathed elements and flange (argon welded)
- Watt density: 12 W/sq.cm
- Aluminium IP65 terminal box, with thermostat as option (internal adjustment)
- Supply 230 / 400V - 3ph

- Particulièrement adapté aux industries alimentaires et pharmaceutiques.
- Montage / démontage ultrarapide
- Nettoyage aisé sans zone de rétention
- Bride et circuits en inox AISI 316L soudés argon
- Charge 12 W/cm²
- Boîtier aluminium IP65 avec option thermostat unipolaire (réglage interne)
- Alimentation 230 / 400V tri


Reference Référence	Output Puissance (W)	Length X Cote X	Cold Lg NC	Weight Poids
TBRC 104 I 021	21 000	970 mm	115 mm	
TBRC 104 I 033	33 000	1 300 mm	115 mm	
TBRC 104 I 050	50 000	1 900 mm	115 mm	

On request:

- Stood off 130mm (terminal box)
- Built in draining cock

Sur demande:

- Boîtier décalé de 130mm
- Robinet de vidange

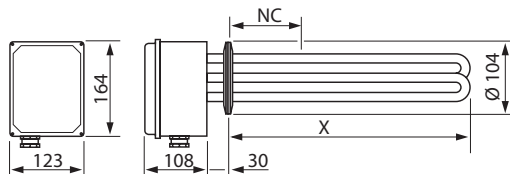

Option

- Built in thermostat with range 30 to 90°C ref: PCAD 090
- Built in thermostat with range 50 to 300°C ref: PCAD 300

Option:

- Thermostat unipolaire intégré plage 30 à 90°C ref: PCAD 090
- Thermostat unipolaire intégré plage 50 à 300°C ref: PCAD 300